


# User Guidelin Asymmetrical Spinnakers

For spinnaker foot 7-8 m +, depends on the boat  
Updated 4. July 2020



## Mounting patches

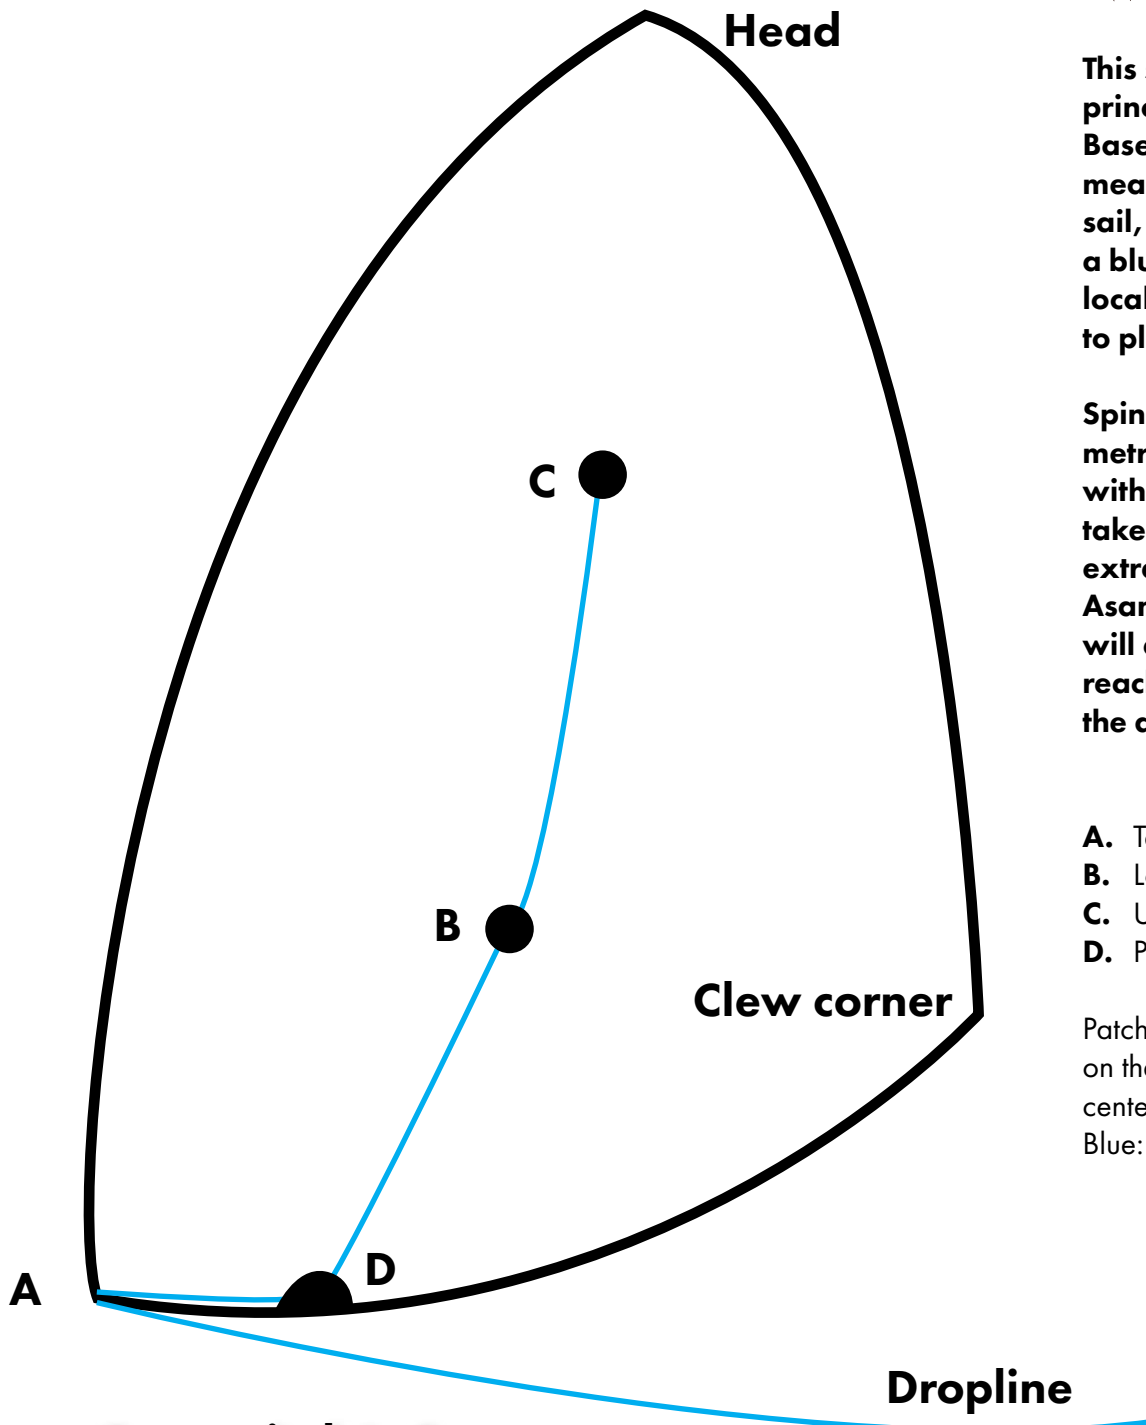

**This shows the principle. Based on your measurements of your sail, we will make you a blueprint telling your local sailmaker where to place the patches.**

**Spinnakers and asymmetrical spinnakers with a wide foot is best taken down with an extra patch in the foot. Assembling the foot will avoid that the sail reaches the water in the drop.**

- A.** Tack corner
- B.** Lower patch
- C.** Upper patch
- D.** Patch in the foot.

Patch (B) and (C) is placed on the spinnakers centerline.  
Blue: Dropline

## Downwind ApS